



**MATERIALE ACCIAIO INOX**  
**PORTATA 10.000 kg**  
**SENSIBILITA' 1,00 mV/V**  
**GRADO DI PROTEZIONE IP65**

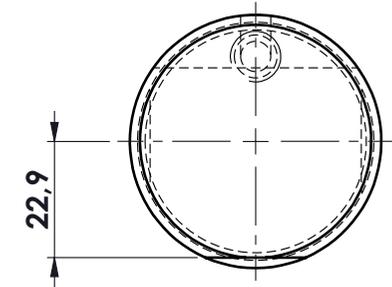

Connettore mod. M12 - 8 poli  
 + contropresa cablata  
 a mt. 20 di cavo  
 mod. SLS-0140

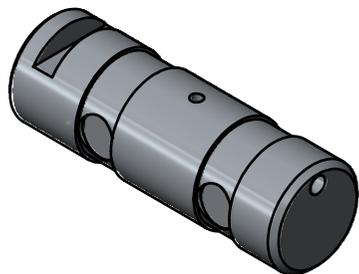

					toller. gen.		0 ÷ 30 ±0.10
							30 ÷ 100 ±0.15
							100 ÷ 300 ±0.25
							300 ÷ 500 ±0.50
							foro/alb H9 - h9
							sm. e raggi 0.5
Ap.	Data	Dis.	descrizione modifica		N° DISEGNO		0 ÷ 30 ±0.10
					C.2207		30 ÷ 100 ±0.15
					disegnato		100 ÷ 300 ±0.25
					GT		300 ÷ 500 ±0.50
					controllato		foro/alb H9 - h9
							sm. e raggi 0.5
MATERIALE			GREZZO		dimens. in mm.		0 ÷ 30 ±0.10
TRATTAMENTO			FINITURA LAVORAZ.		Scala		30 ÷ 100 ±0.15
					1:1.5		100 ÷ 300 ±0.25
					peso kg.		300 ÷ 500 ±0.50
					2.20		foro/alb H9 - h9
					Data		sm. e raggi 0.5
					23/03/2022		
					CELLA DI CARICO A PERNO		
					mod. PRH 10019		
					ASSIEME		
					foglio		1
					di		1
					MATERIALE		
					GREZZO		
					TRATTAMENTO		
					FINITURA LAVORAZ.		
					PROPRIETA' METIOR srl VIETATA LA RIPRODUZIONE ANCHE PARZIALE SENZA PREVIA AUTORIZZAZIONE		

