

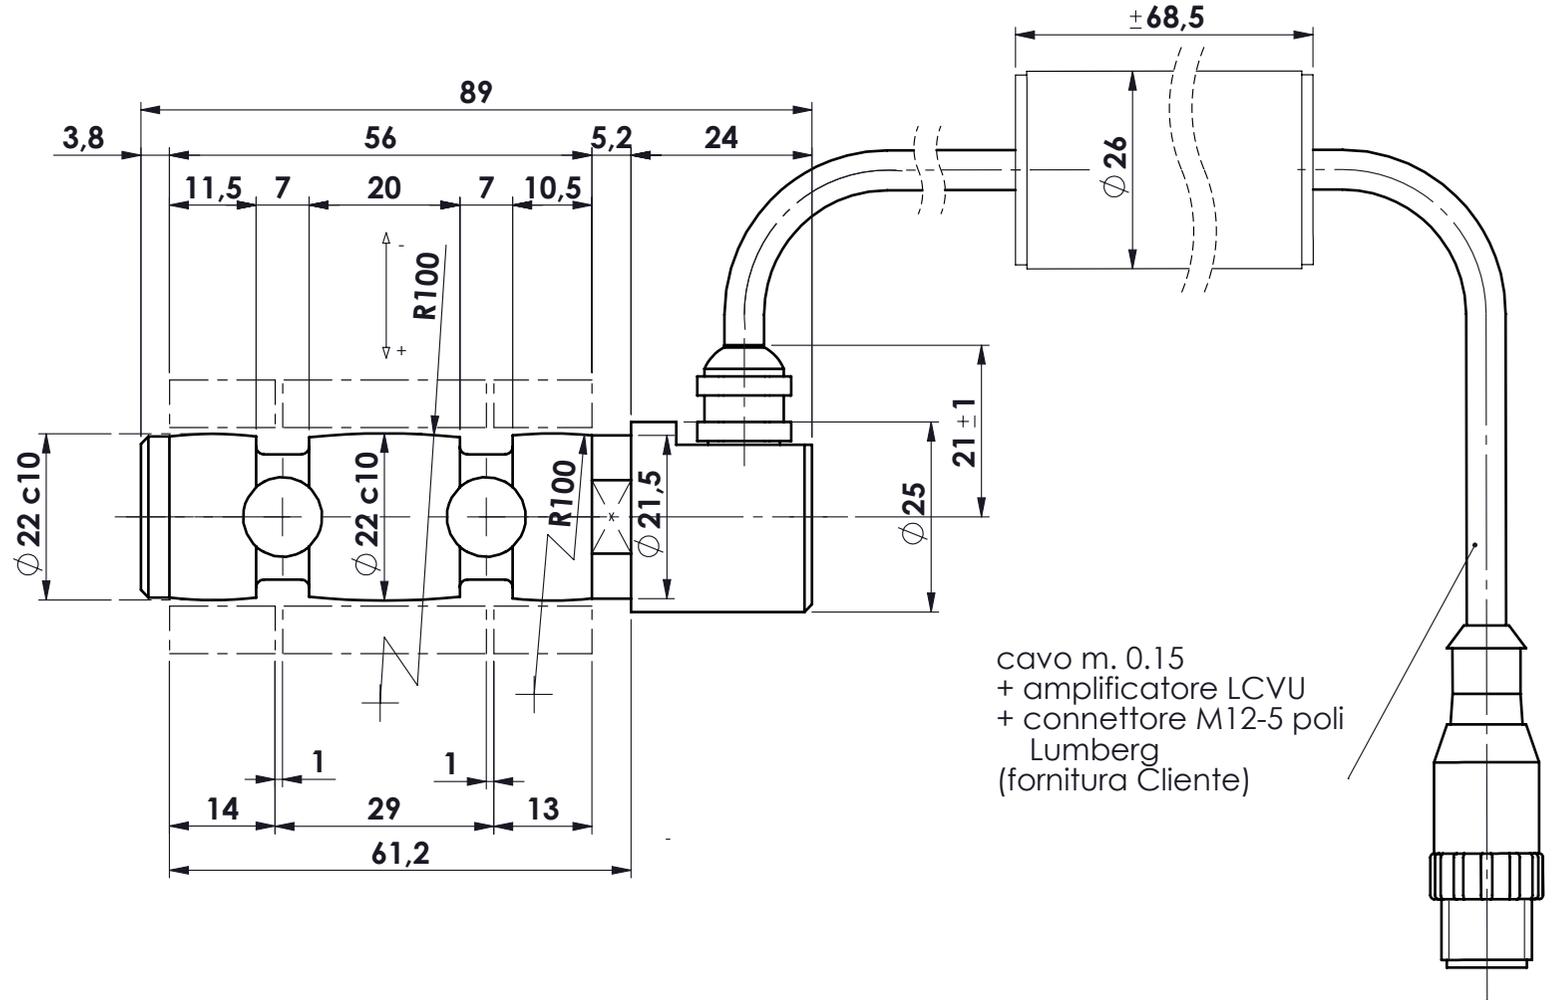


pressacavo M8  
cavo m. 2.5  
mod. SLS-0140

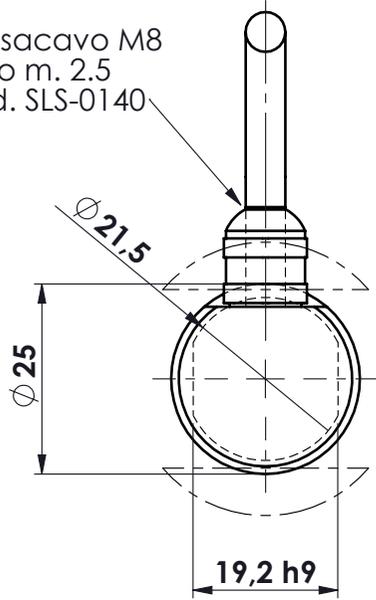

cavo m. 0.15  
+ amplificatore LCVU  
+ connettore M12-5 poli  
Lumberg  
(fornitura Cliente)

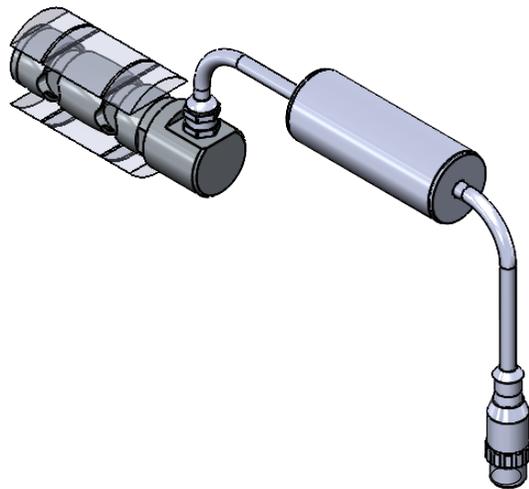

**MATERIALE ACCIAIO INOX**  
**PORTATA  $\pm 1000$  daN**  
**SENSIBILITA'  $0 \div 10$  V**  
**(taratura 1 mV/V)**

toller. gen.	0 ÷ 30	±0.10
	30 ÷ 100	±0.15
	100 ÷ 300	±0.25
	300 ÷ 500	±0.50
	foro/alb H9 - h9 sm. e raggi	0.5

	peso kg. 0.31	CELLA DI CARICO A PERNO mod. PRY 1000 daN/4 ASSIEME CELLA
	Data 23.01.2015	
dimens. in mm.	Scala 1:1	
MATERIALE	GREZZO	
TRATTAMENTO	FINITURA LAVORAZ.	
PROPRIETA' METIOR srl VIETATA LA RIPRODUZIONE ANCHE PARZIALE SENZA PREVIA AUTORIZZAZIONE		

N° DISEGNO	C.1518	foglio 1 di 1
disegnato	FB	controllato

