

MATERIALE ACCIAIO INOX

PORTATA 9000 kg

SENSIBILITA' 4÷20 mA

Scheda di trasmissione digitale integrata



Connettore mod. M12 - 8 poli
+ contropresa cablata

q mt. 10' cavo

mod. SLS-0224 Water (6 conduttori)

PONTE A:

1 - rosso + alimentazione

2 - nero - alimentazione


3 - verde segnale (4÷20 mA)

PONTE B:

4 - blu + alimentazione

5 - marrone - alimentazione

6 - bianco segnale (4÷20 mA)

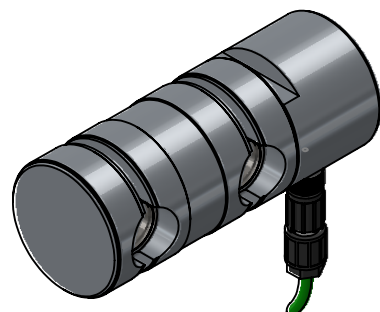

				toler. gen.	0 ÷ 30 ±0.10
					30 ÷ 100 ±0.15
					100 ÷ 300 ±0.25
					300 ÷ 500 ±0.50
Ap.	Data	Dis.	descrizione modifica		foro/alb H9 - h9 sm. e raggi 0.5

Ap.	Data	Dis.	descrizione modifica
-----	------	------	----------------------

The diagram shows two geometric solids in orthographic projection. On the left is a cylinder, represented by a circle in the front view and a rectangle in the top view. On the right is a truncated cone, represented by a trapezoid in the front view and a rectangle in the top view. The two objects are positioned side-by-side on a common horizontal reference line.

dimens. in mm. Scala 1:2

	MATERIALE
--	-----------

TRATTAMENTO

PROPRIETA' METIOR srl VIETATA LA RIF

CELLA DI CARICO A PERNO mod. PRH 9003 DOP ASSIEME PERNO

N° DISEGNO	C.2348
------------	--------

disegnato	GT
-----------	----

[illegible]

CLIMATIC

 **Metric**

3	foglio	1
	di	1

	controllato
--	-------------

OR

ON S.r.l.